

Series	AGM-S	Warranty	See Warranty Terms
Volts	12	BCI	J185
Cells	6		
Terminal Type		DT	
Included Hardware		Stainless Steel Nuts & Bolts	
Size & Thread		DT	

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	45 A
Maximum Charge Current	65 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	2.3 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1000			
Marine Crank Amps (MCA) 32°F / 0°C	1200			
Reserve Capacity (RC @ 25A)	420 Minutes			
Reserve Capacity (RC @ 75A)	110 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	240 AH	2.4 A
@ 20 Hour Rate	215 AH	10.75 A
@ 10 Hour Rate	193 AH	19.3 A
@ 5 Hour Rate	172 AH	34.4 A

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	112	66.1	50.6	33.7	22.7	19.3


Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	63.5 kg	140 lbs
	Length	38.1 cm	15"
	Width	17.8 cm	7.01"
	Height Inc. Term.	37.1 cm	14.61"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

Cycle Life vs. Depth of Discharge

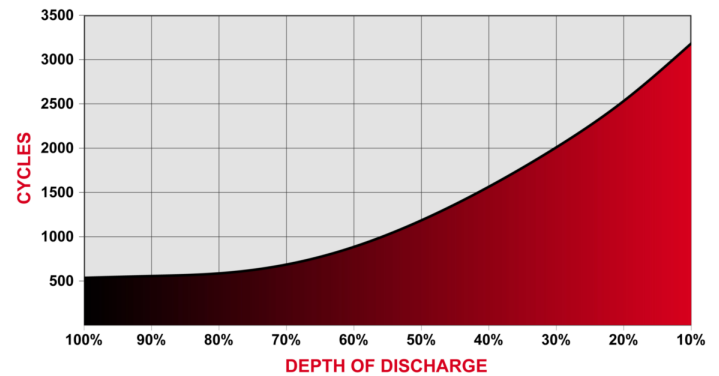

Capacity vs. Temperature

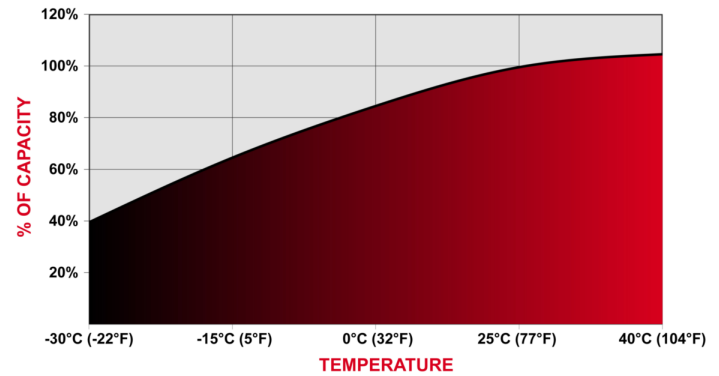

Detailed Illustration

