



Series	4000	Warranty	3 Years
Volts	6	BCI	L16
Cells	3	Plates/Cell	18
Terminal Type	LT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	Optional: 19" 4/0 interconnect cable		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	55 A
Maximum Charge Current	95 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1169
Marine Crank Amps (MCA) 32°F / 0°C	1462
Reserve Capacity (RC @ 25A)	943 Minutes
Reserve Capacity (RC @ 75A)	248 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>560 AH</b>	<b>5.60 A</b>
@ 72 Hour Rate	<b>545 AH</b>	<b>7.58 A</b>
@ 50 Hour Rate	<b>526 AH</b>	<b>10.52 A</b>
@ 20 Hour Rate	<b>487 AH</b>	<b>24.35 A</b>
@ 15 Hour Rate	<b>458 AH</b>	<b>30.52 A</b>
@ 10 Hour Rate	<b>438 AH</b>	<b>43.83 A</b>
@ 8 Hour Rate	<b>419 AH</b>	<b>52.35 A</b>
@ 5 Hour Rate	<b>328 AH</b>	<b>65.52 A</b>
@ 1 Hour Rate	<b>229 AH</b>	<b>228.89 A</b>


Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications

	Weight	56.5 kg	124.5 lbs
	Length	31.8 cm	12.5"
	Width	18.1 cm	7.13"
	Height Inc. Term.	42.55 cm	16.75"
Electrolyte Reserve	57 mm	2.25"	
Container	High Density Polypropylene		
Cover	High Density Polypropylene		
Handles	Rope / Plastic Handle		

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

### Cycle Life vs. Depth of Discharge

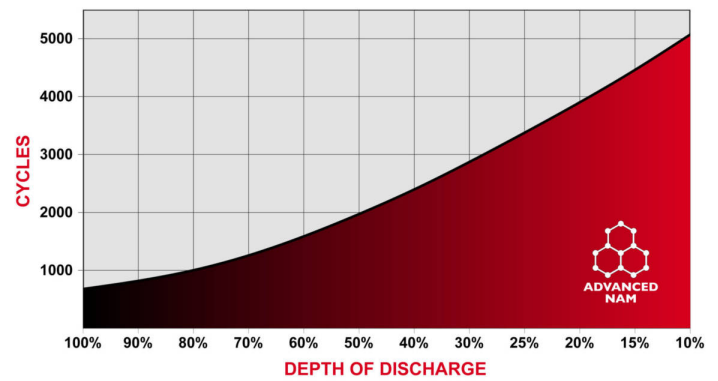

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

